



One Piece Cable Clamp

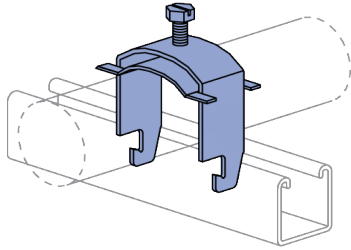

Material:

- The steel meets or exceeds the physical properties of ASTM A1011 GR 33, except with SS, ST & AL finishes.

Finishes:

- Electrogalvanized (EG):** Conforms to ASTM B633, Type III SC1
- Kokastrut Defender (DF)** Conforms to ASTM A1059
- Hot Dip Galvanized (HG):** Conforms to ASTM A123 or A153
- Perma-Gold (ZD):** Conforms to ASTM B633, Type II SC1
- Copper Coated (CC):** TBD
- Everdur (E EG):** TBD
- Stainless Steel, Type 304 (SS):** ASTM A240, Type 304 *
- Stainless Steel, Type 316 (ST):** ASTM A240, Type 316 *
- Aluminum (AL):** TBD

* These materials have different physical properties and performance characteristics. Please [contact us](#) for design support.

Material & Finish Combinations:

Material / Finish	Part Number Suffix	Pipe Clamp Material / Finish	Fasteners (Screw & Nut) Material / Finish	Example
Electro-galvanized	EG	EG	EG	CC025 EG
Hot-dipped galvanized	HDG	HDG	SS	CC025 HDG
Unistrut Defender	DF	DF	DF	CC025 DF
Stainless Steel Type 304	SS	SS	SS	CC025 SS
Stainless Steel Type 316	ST	ST	SS	CC025 ST
Aluminum	AL	AL	AL	CC025 AL
Copper Coated	CC	CC	CC	CC025 CC
Everdur	E EG	EG	E	CC025E EG

Part No.	Nom. Pipe Size	Trade Size O.D. (Min)	Trade Size O.D. (Max)	Bolt Size	Finish
CC025	1/4" (6)	0.375" (9.5)	0.55" (14)	5/16" -32	EG
CC037	3/8" (10)	0.55" (14)	0.63" (16)	5/16" -32	EG
CC050	1/2" (13)	0.63" (15.9)	0.79" (20)	5/16" -32	EG
CC075	3/4" (19)	0.79" (20)	1.05" (26)	5/16" -32	EG
CC100	1" (25)	1.05" (26)	1.26" (32)	5/16" -32	EG
CC125	1-1/4" (32)	1.26" (32)	1.57" (40)	5/16" -32	EG
CC150	1-1/2" (38)	1.63" (41.3)	1.81" (46)	5/16" -32	EG
CC175	1-3/4" (45)	1.81" (46)	2.05" (52)	5/16" -32	EG
CC200	2" (51)	2.05" (52)	2.30" (58)	5/16" -32	EG
CC225	2-1/4" (58)	2.30" (58)	2.60" (66)	5/16" -32	EG
CC250	2-1/2" (64)	2.60" (66)	2.75" (70)	5/16" -32	EG
CC275	2-7/8" (73)	2.75" (70)	3.07" (78)	5/16" -32	EG
CC300	3" (76)	3.07" (78)	3.23" (82)	5/16" -32	EG
CC325	3-1/4" (82)	3.23" (82)	3.54" (90)	5/16" -32	EG
CC350	3-1/2" (89)	3.54" (90)	3.94" (100)	5/16" -32	EG
CC400	4" (102)	4" (102)	4.50" (114.3)	5/16" -32	EG
CC450	4-1/2" (114)	4.50" (114.3)	4.96" (126)	5/16" -32	EG